



First Step For Machining And Producing Aluminum Trigger Activator  
 Pool CDS OR STICK WITH TENSION OR PRESSURE IMPROVED ROD WITH PROPERED IMPROVED BY PRESSURE REGULATION OR ADJUSTMENT

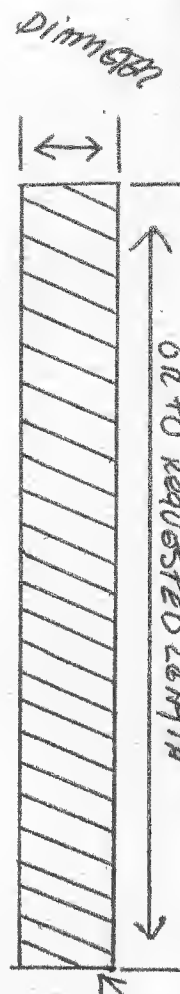

1. SOLID ALUMINUM POWDER OR BILLET

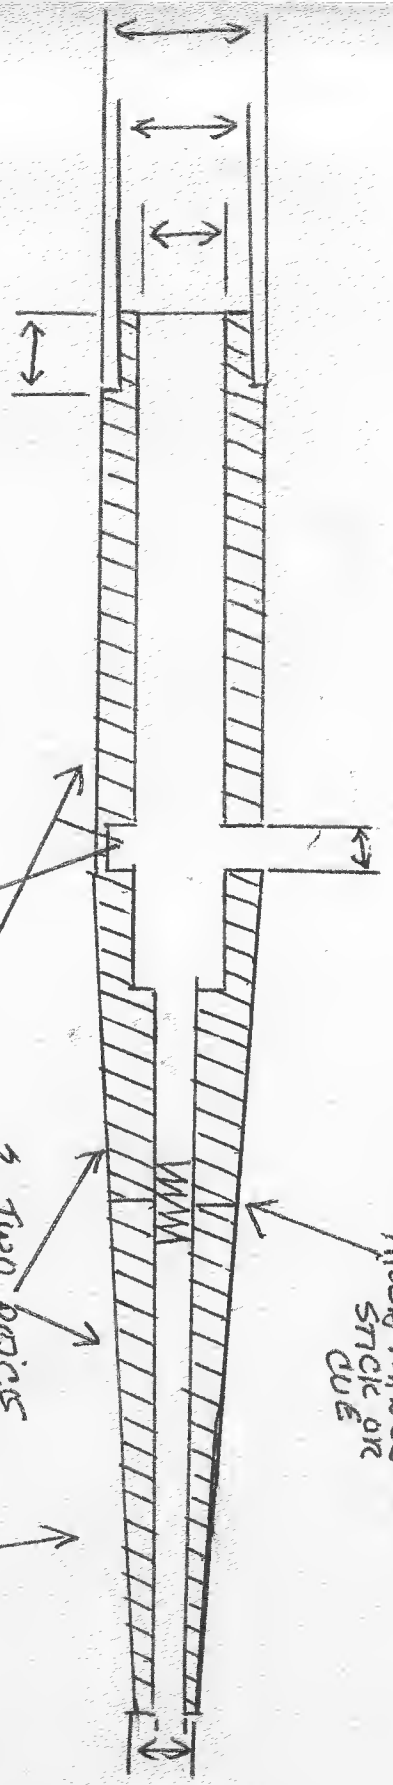


4. CENTER MATHING OR AREA MIDLES OF STICK OR GUE

3. TWO PERIES UNIT SEARDED TOGETHER.

2. SOLID ALUMINUM DOWN OR BILLET FROM DRILLING AND LATHE MACHINING.

3/4 THICKNESS OF AVAILABLE METAL.

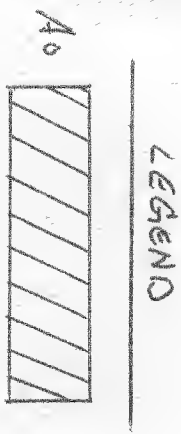

(2) IMPACT ROD FOR TRIGGER ACTUATED POOL STICK OR CUE USING TENSION OR PRESSURE IMPACTED ROD WITH/AND PROPELLED IMPACT TIP

IMPACT ROD RESIDES IN AND OPERATES IN HOUSING THIS AREA MAXIMUM 3 OR EXTENDED LENGTH 3 AFTER TRIGGER RELEASE

MACHINED ALUMINUM HOUSING OR POOL STICK w/o MECHANICAL MOVING PARTS INSIDE OR IMBODIMENT



SCREWS TOGETHER HERE, TWO PER ROD IN CENTER WITH MACHINED THREAD TO COUPLE TOGETHER AS ONE.



CAN BE ANY TYPE OF METAL



THREADS BRASS COUPLER TO JOIN IMPACT ROD THAT CAN ALSO BE USED FOR GUIDES

LEGEND



MEMOR ANY TYPES ALUMINUM STEEL, STAINLESS STEEL, BRASS

Ao




35765

PATENT TRADEMARK OFFICE

(RELEASE MECHANISM) FOR IMPACT


SPOONED EJECTOR  
OR CATCH AND  
SLIDER FOR TRIGGER  
RELEASES & MACHINED  
IN IMPACT BARREL

TOP VIEW

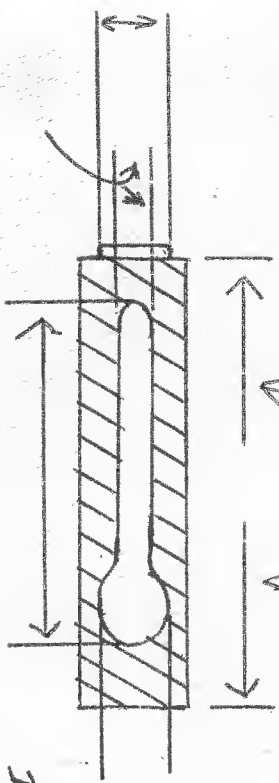


IMPACT BARREL OR  
RELEASE MECHANISM  
WITH 3" SLIDING  
CAPABILITY FORWARD  
AND BACKWARD

(STARTS OUT WITH)  
SOLID METAL.  
MACHINED HOLLOW  
TO SPECIFIC SPEEDS  
WITH SLIDER SCOTS

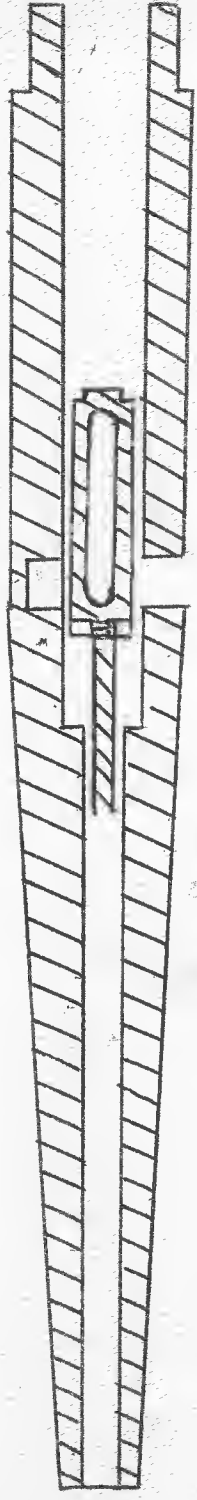

SIDE VIEW OF  
RELEASE MECHANISM  
NOTCHED SLIDER FOR  
TRIGGER MACHINED

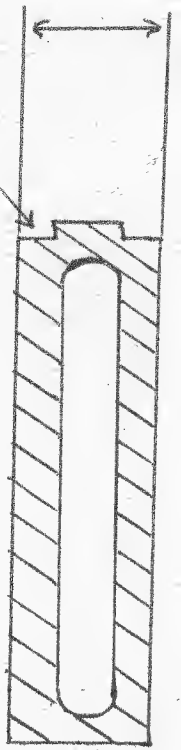

RIDING AREA FOR  
WASHER + SPRING  
MACHINED WASHER



THREADED HOLE IN  
OPPOSITE END OF ACCOMMODATE  
MECHANISM TO 1/4"  
IMPACT ROD.

REVISED FROM FIRST SET



35765

PATENT TRADEMARK OFFICE

(3)

4. EXPOSED VIEW OF TRIGGER OR  
 RELEASES BUTTON FOR IMPACT  
 STICK OR BAZZER RELEASE MECHANISM.

SCORED GUIDE FOR  
 RETAINER RING.

RELEASE  
 BUTTON

SLIDES FORWARD OF RETAINER  
 INTO SCORED AREA AS RETAINER  
 RELEASES BUTTON DISTANCE  
 AND TRAVEL DISTANCE IN SLOT.

HANDS HAS  
 KNUCKLING GRIP

SCORED IN  
 GUIDE.  
 BAZZER


PART # 41

BUTTON RETURN  
 SPRING

RETAINER RING  
 FOR RELEASE  
 BUTTON OR TRIGGER  
 MECHANISM

BOTTOM SIDE  
 OF BUTTON VIEW


CUTOUT AREA FOR  
 RETURN SPRING FOR  
 RELEASES BUTTON.

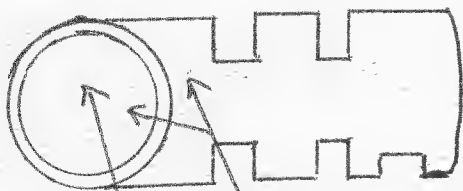

REVISED FROM FIRST SET.


TENSION ADJUSTMENT PART OR SYSTEM, FOR REGULATING AMOUNT OF IMPACT OR HIT WHEN RELEASE MECHANISM IS TRIGGERED

50

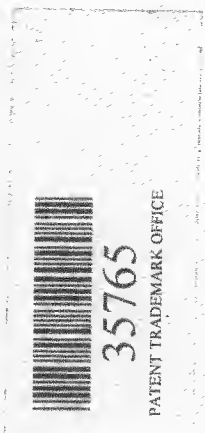

THRUST ROD SPRING

SPRING ANY TYPE OR STRENGTH OR PRESSURE OR LBS

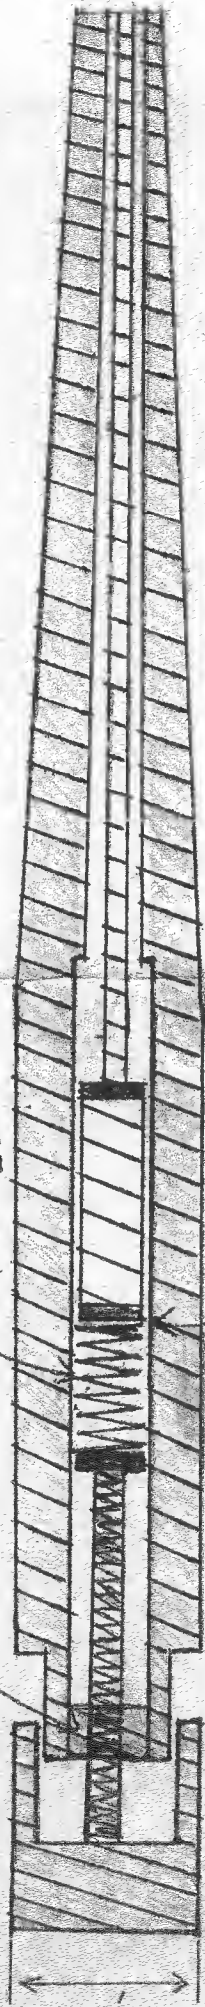

TO REAR OF STICK


TENSION ADJUSTMENT PART STARTS FROM THIS POINT TO REAR OF STICK

3




TENSION SPRING TO PRODUCE ANY AMOUNT OF IMPACT TO PROPEL OR PUSH OR GIVE INERTIA TO IMPACT ROD AND TIP

10



TENSION OR PRESSURE THREADED T-ROD FOR COMPRESSING SPRING BARREL TO REGULATE AMOUNT OF IMPACT WHEN TRIGGER IS ACTUATED


20



HANDLE USED OR UTILIZED TO ADJUST TENSION BY TURNING CLOCKWISE OR, COUNTERCLOCKWISE THAT IS CONNECTED TO END OF THREADED T-ROD THAT TRAVELS FORWARD AND BACKWARD TO ADJUST SPRING TENSION



60 EXPLODED VIEW OF IMPACT TIP



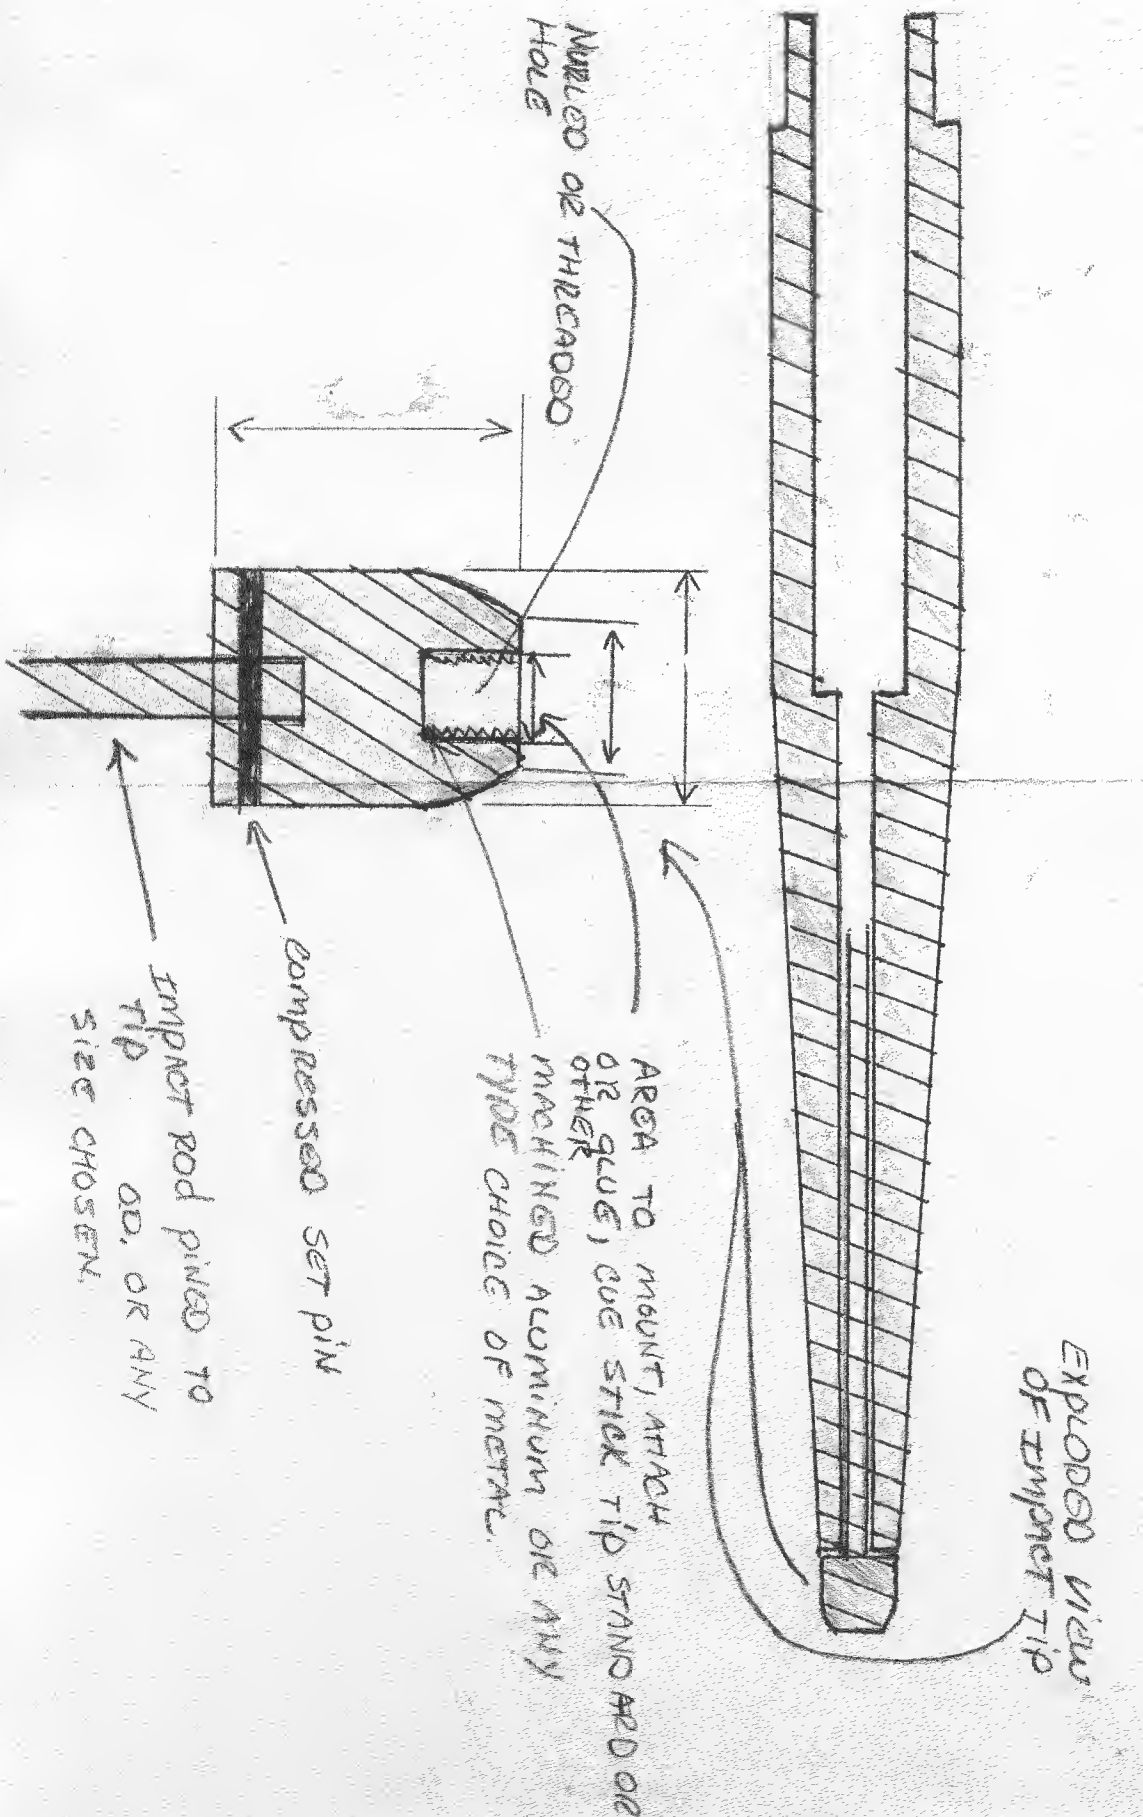


PATENT TRADEMARK OFFICE

35765



FIG 1 DETAILED & # 20  
DESCRIPTION OF QUE IN ITS  
COCKED POSITION.

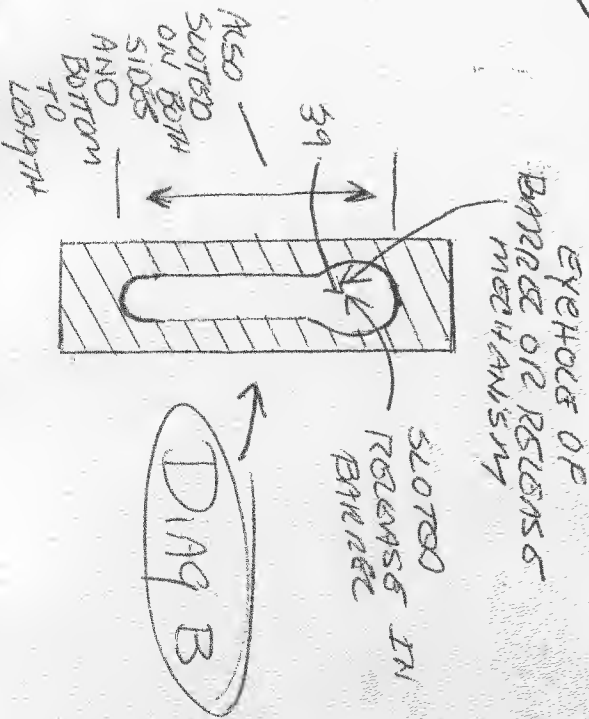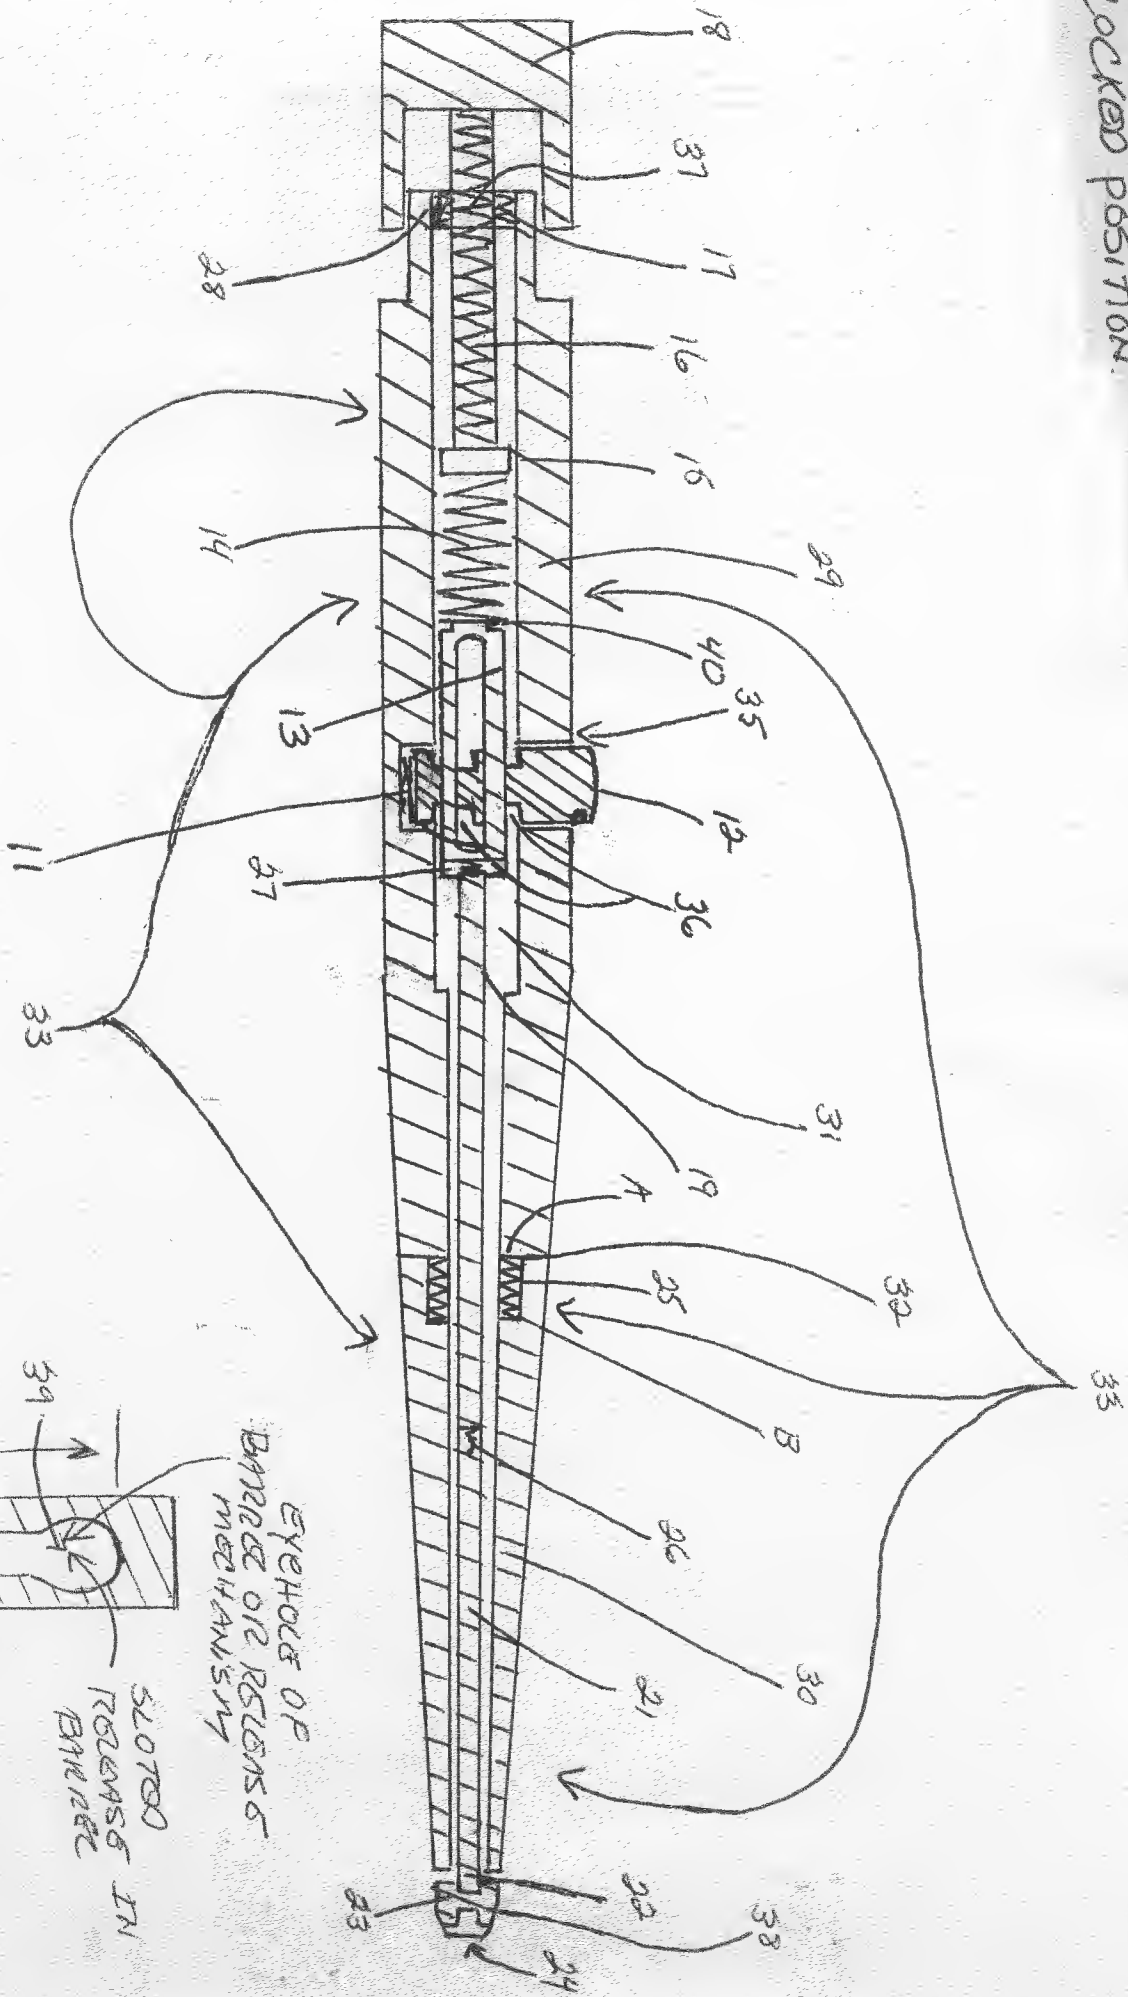


35765

PATENT TRADEMARK OFFICE

REVISED FROM FIG 1 SET

FIG 1 DETAILED & # 20  
DESCRIPTION OF QUE IN ITS  
COCKED POSITION.

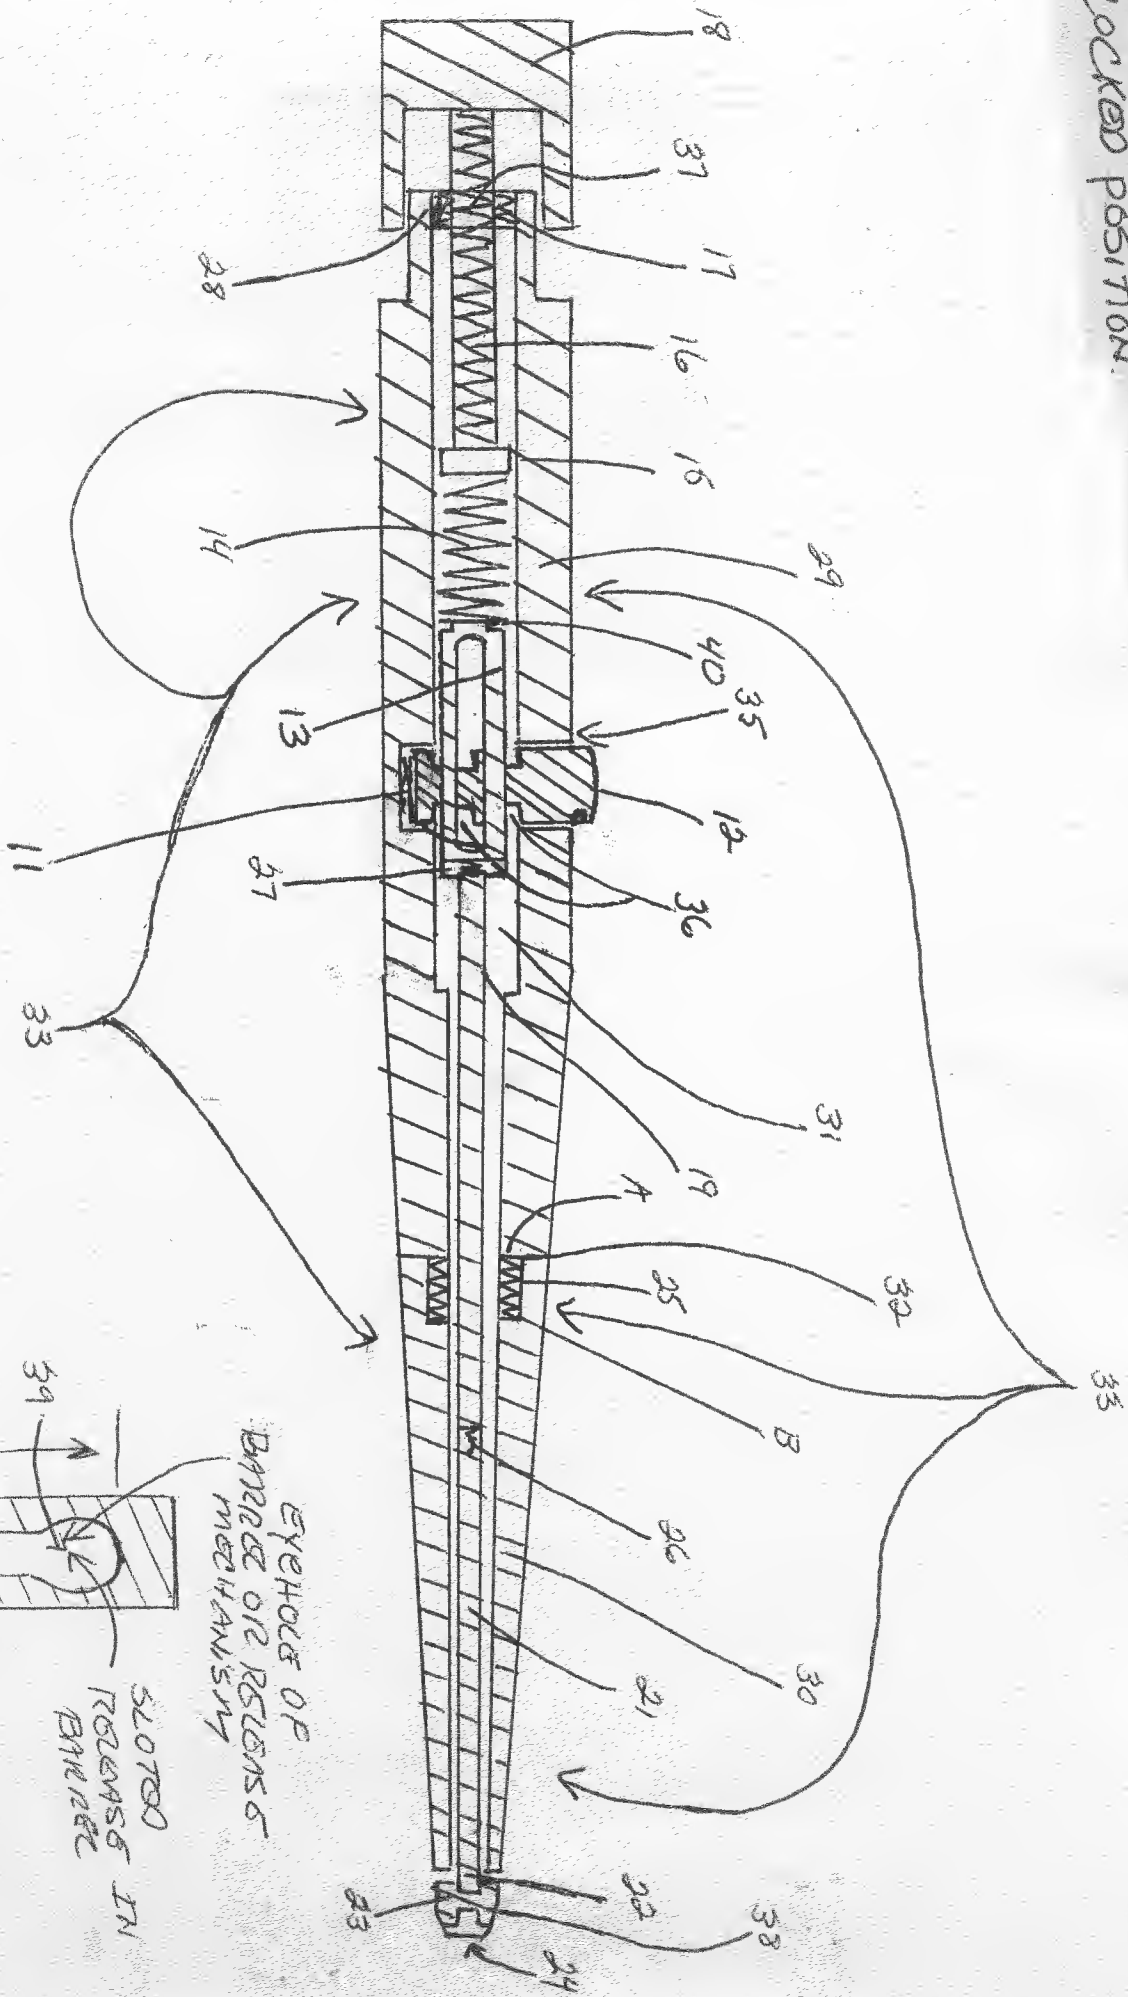

ALSO SLOTTED  
ON BOTH  
SIDES  
AND  
BOTTOM  
TO  
LENGTH 39

EYE HOLE OF  
BARREL OR RESONANT  
MECHANISM

SLOTTED  
RELEASE IN

DIAG B



35765

PATENT TRADEMARK OFFICE

REVISED FROM FIG 1 SET